
MODULUS PACKAGED TREATMENT PLANT

- Lightweight rotational moulded HDPE construction
- Innovative modular design
- Fully tested to essential requirements of EN12566-3:2005+A1:2009
- Optional configuration to suit footprint
- Gravity and pumped discharge options
- 3-stage process employing submerged and biological aerated filter (SAF/BAF) technology
- Includes blower unit, housing and pedestrian rated inspection covers



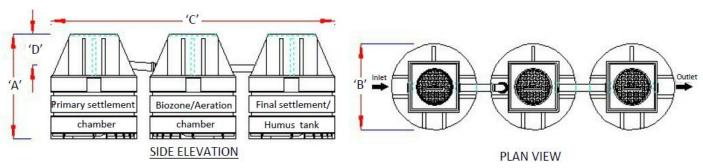

Sizes and Specification

Product Code	Population Equivalent*	Hydraulic Flow (litres/day)	BOD Loading (kg/day)	Overall Height 'A' (mm)	Width 'B' (mm)	Length 'C' (mm)	Inlet Invert 'D' (mm)
OM6LP	6	1200	0.36	1,090	1,260	4,180	315
OM6	6	1200	0.36	1,535	1,260	4,180	485
OM9	9	1800	0.54	1,535	1,260	4,180	500
OM12	12	2400	0.72	1,920	1,260	4,180	535
OM20	20	3600	1.20	2,135	1,260	4,180	485
OM25	25	4500	1.50	2,135	1,260	4,180	500
OM30	30	5400	1.80	2,100	1,560	5,080	250
OM40	40	7200	2.40	1,940	2,010	6,580	500
OM50	50	9000	3.00	2,100	2,150	7,800	360